

Part Leveling Machine

Core Leveler 60

The smart entry into leveling

For parts up to 1600 mm wide and 15 mm thick



Your benefits summed up:


- Siemens control system with intuitive touch display
- Simple and easy operation
- An economical entry into leveling. Backed by genuine KOHLER quality
- Space-saving, compact design

Unleveled – Levelled



LEVELING FOR THE NEXT LEVEL

Precise and efficient leveling

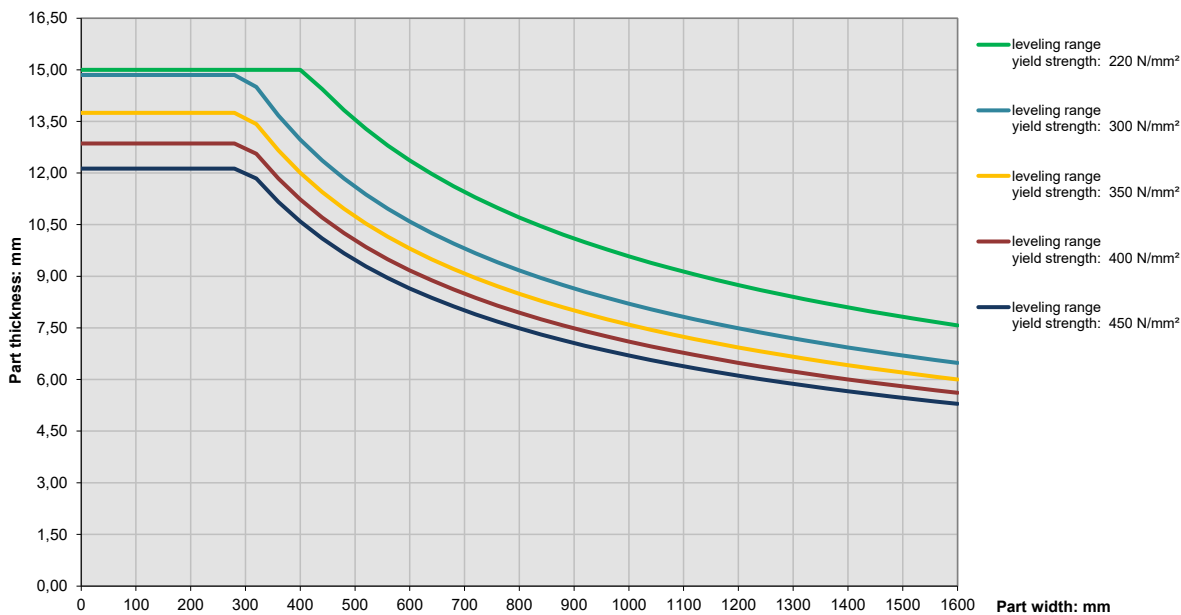

The values are given are based on theoretical analyzes and many years of experience of KOHLER Maschinenbau GmbH. However, these values may differ in the specific application. The values are to be regarded as general guidelines only and not as binding specification data. The information is not binding and will not become part of the contract. Depending on the property of the material used, especially when using more complex and pre-treated materials, deviations may occur. Restrictions with thinner materials have to be considered.

Even and low-stress sheets

Machine type	Core Leveler 60
Material thickness (in mm)	0,7 - 15 mm
Max. material width (in mm)	1600
Min. part length (in mm)	118
Setting	Electromotive
Visualization	Full-color display
CE certificate	Standard
Floor space (L x W x H in mm)	2830 x 1340 x 2004
Weight (in kg) without options	6700
Power	Standby: approx. 0.14 kW Idle operation at 6 m/min: approx. 0.9 kW *Leveling operation at 6 m/min (material S235, 300 × 425 mm, thickness = 5 mm): approx. 1.3 kW

*9 m/min (medium speed), thickness: 2 mm, length: 390 mm, width: 250 mm, material: aluminum